ELECTRICAL	
VOLTAGE	220/440 VOLTS
PHASE	SINGLE OR 3 PHASE
FREQ.	50/60HZ
AMPS	1 PHASE 70 AMP\3 PHASE 230v\40AMPS 440v\20AMPS
CHAMBER VOL.	
PRI. CHAMBER VOL.	160 CF (4.53 CM) TOTAL OR 40 CF (1.13 CM) PER CHAMBER
SEC. CHAMBER VOL.	180 CF (5.09 CM)

GAS	
NATURAL GAS PRESSURE	12"TO 15"W.C.(304MM TO 381MM)
PROPANE PRESSURE	11"W.C. (288MM)
FLOW RATE	5,000,000 BTU/HR

MACHINE DIMENSIONS	
A	196.75
B	98.50
C	21.00
D	21.00
E	35.75
F	112.50
G	21.50
H	102.50
I	113.375
J	221.00
K	108.50

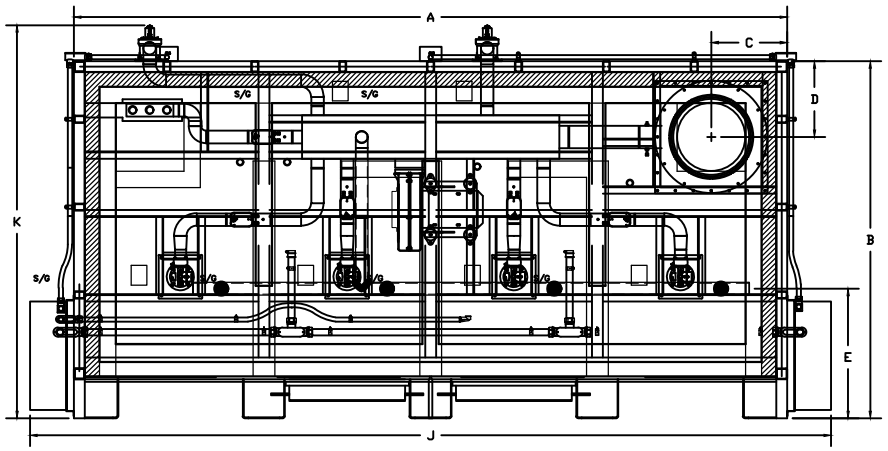

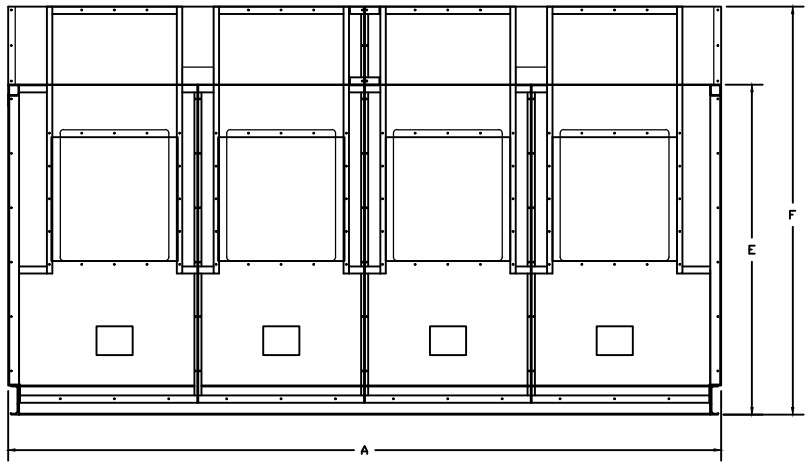

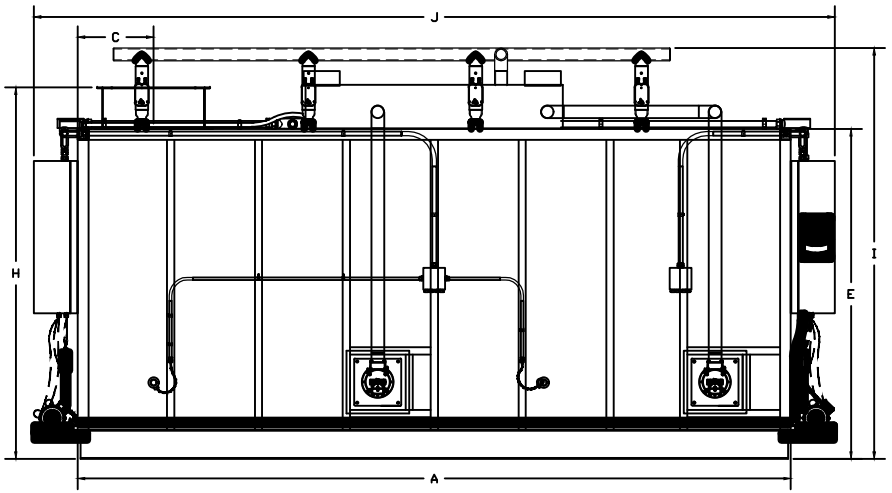

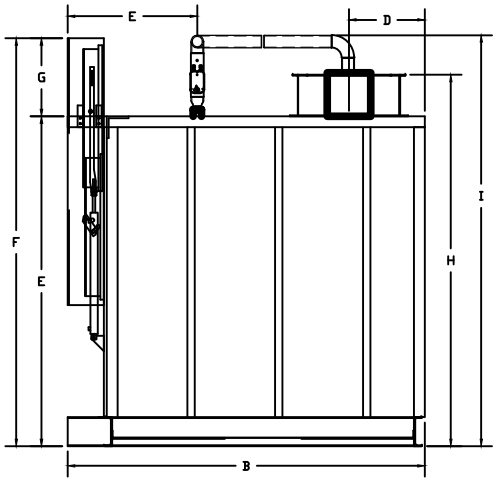

NO.	DATE

KELLER MANUFACTURING
4442 HOLDEN ROAD
LAKELAND, FL. 33811
863-937-8928

DRAWN BY: JLG — DATE
CHECKED BLK — DATE
JOB NO.

THIS DRAWING IS THE PROPERTY OF KELLER. REPRODUCTIONS ARE RELEASED SOLELY FOR QUOTATION, MANUFACTURING OR PURCHASING PURPOSES ONLY. RELEASE OF DRAWINGS TO OTHERS DOES NOT ALLOW LICENSING IN ANY WAY.

TITLE
MACHINE SPECIFICATIONS

MODEL NO. KMA
PLOT SCALE NTS
SIZE
SHEET
REV.

KMA-1200-1000